
RB411UAHL

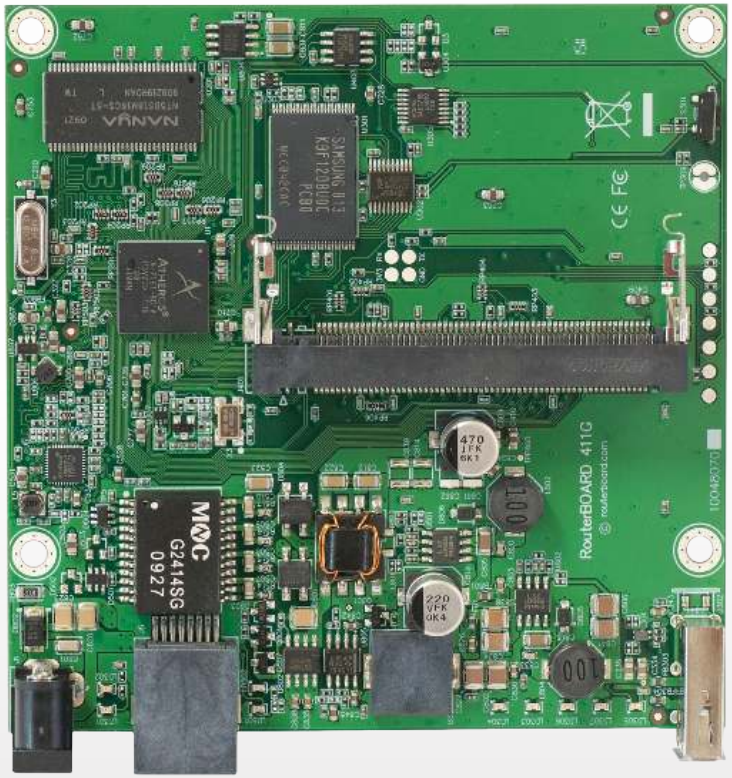

The RB400L is our new low cost series. The RB411UAHL has one miniPCI slot, one Ethernet port and a USB port.

Use this device in an outdoor case for a CPE device, or a point to point wireless link installation. The miniPCI slot allows you to choose your own preferred wireless card model.

It's powered by an Atheros 680MHz CPU and has 64MB of RAM and a Level4 RouterOS license.

CPU	Atheros AR7161 680MHz
Memory	64MB DDR SDRAM onboard memory
Boot loader	RouterBOOT
Data storage	NAND memory chip
Ethernet	One 10/100 Mbit/s Ethernet ports with Auto-MDI/X
miniPCI	One MiniPCI Type IIIA/IIIB slots
Expansion	One powered USB 2.0 port
Extras	Reset switch, beeper, voltage monitor
Serial port	-
LEDs	Power, NAND activity, 5 user LEDs
Power options	Jack 8-28V DC; PoE: 8-28V DC on Ether1 (Non 802.3af).
Dimensions	105 mm x 105 mm, Weight: 105g
Power consumption	1,4W board only, 10W available to minIPCI card
Operating System	MikroTik RouterOS, L4 license