
PW48V-12V85W

±48 V DC telecom Open Frame Power supply with 12 V 7 A output, for use with Cloud Core Routers since revision “r2” or the new CCR2004-1G-12S+2XS and CRS326-24S+2Q+RM. Simply remove one of the current power supplies and replace with the new PW48V-12V85W for ±48 V installations.

Although made specifically for -48 V telecom power, the supported input range is from 36 V to 57 V. Note: To use, positive terminal must be 36 V to 57 V higher potential than negative terminal (eg. if negative terminal is -48 V, the positive must be -12 to +9 V).

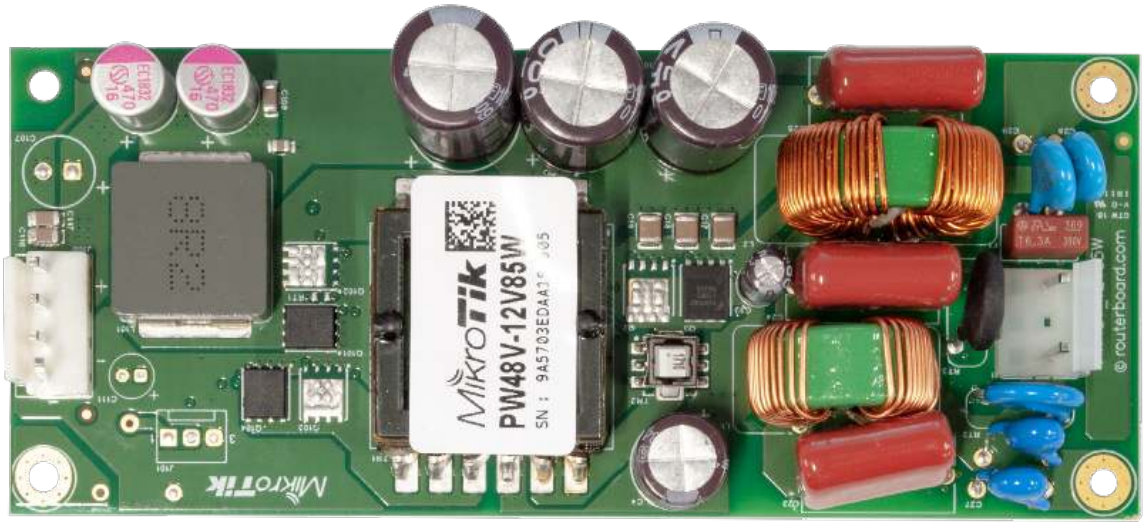

Specifications


Product code	PW48V-12V85W
Input	±48 V, 3 A
Output	12 V, 7 A
Operating temperature	-20°C .. +60°C
Dimensions	118 x 52 mm

Included parts



Power cable

Example

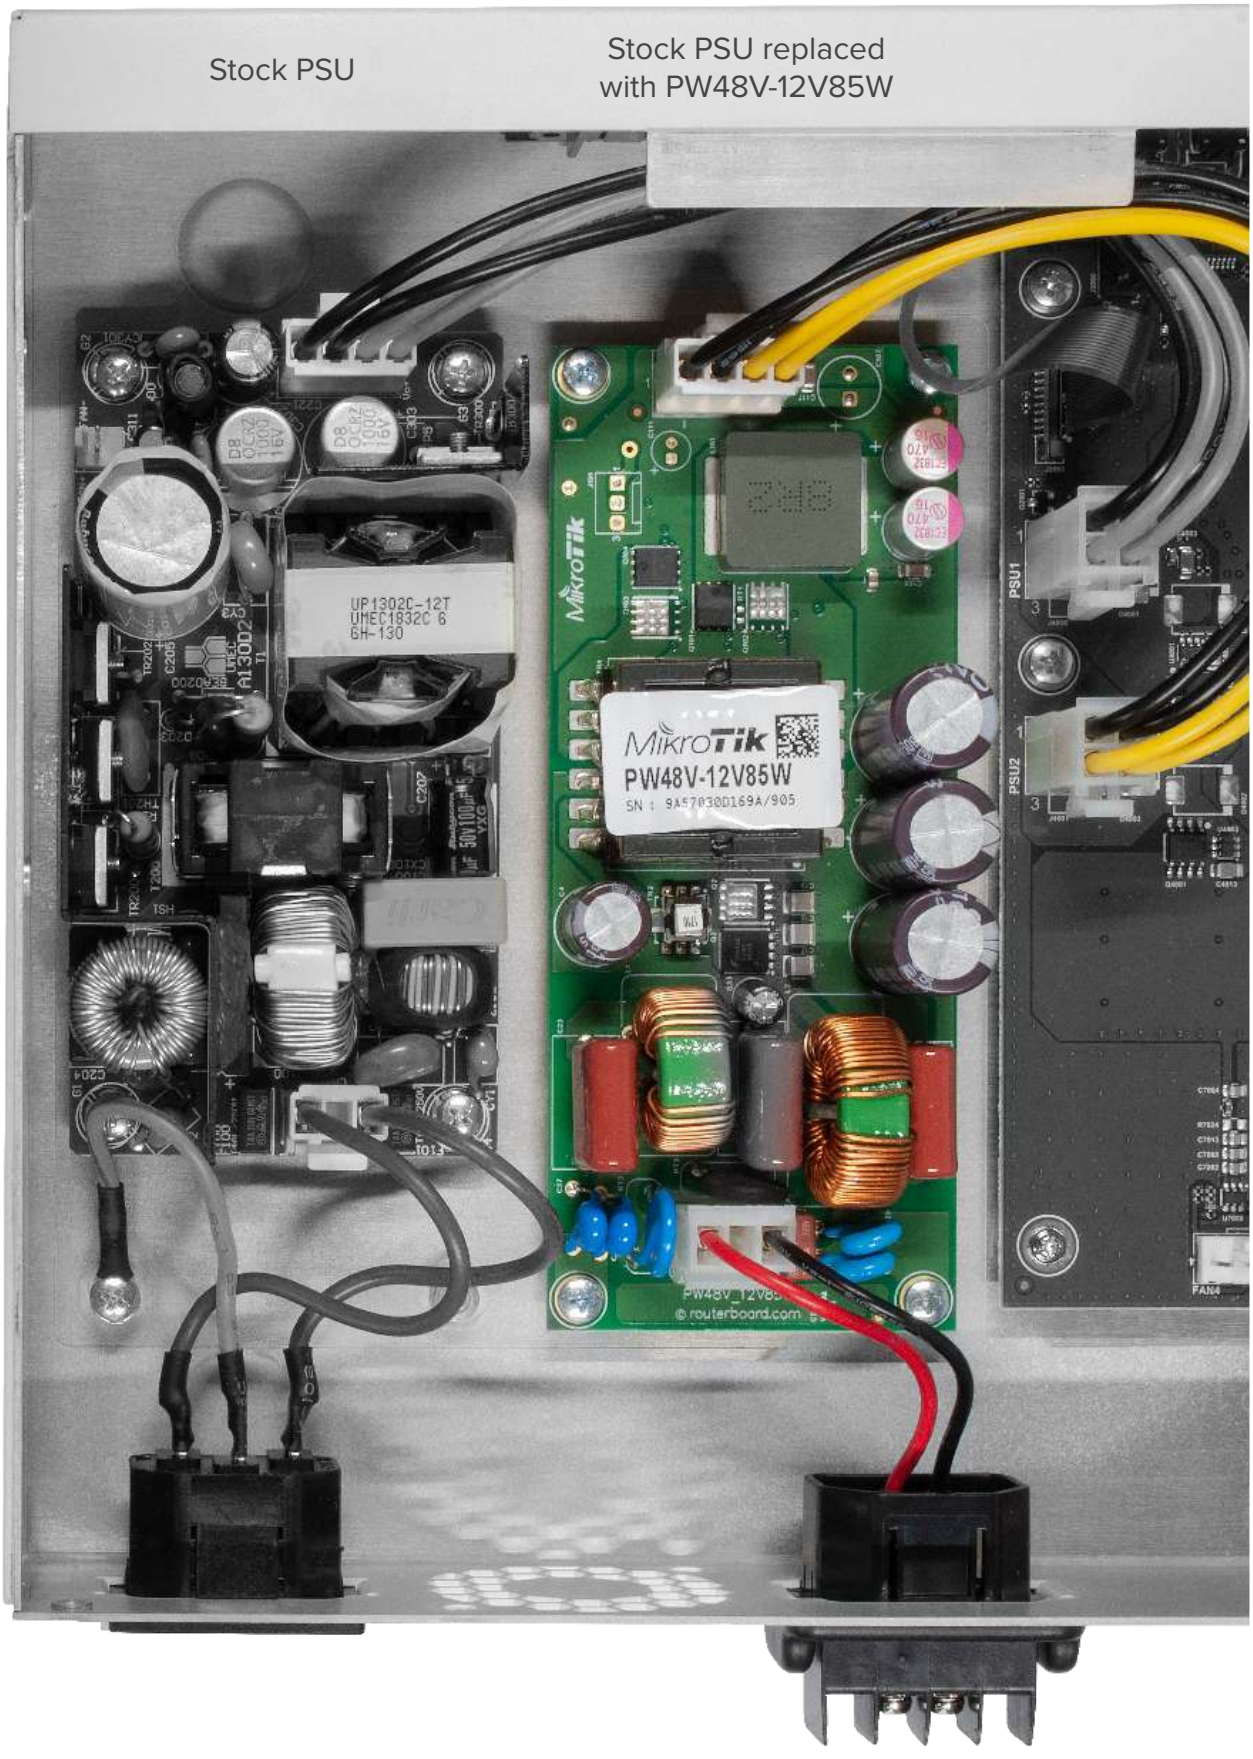
Stock PSU
Stock PSU replaced with PW48V-12V85W
MikroTik
PW48V-12V85W
SN : 9A57030D169A/905
PSU1
PSU2
© routerboard.com